


# NORVI CONTROLS

## NORVI X-R8



2014/30/EU- Electromagnetic Compatibility (EMC)  
Annex III, Part B, Module C

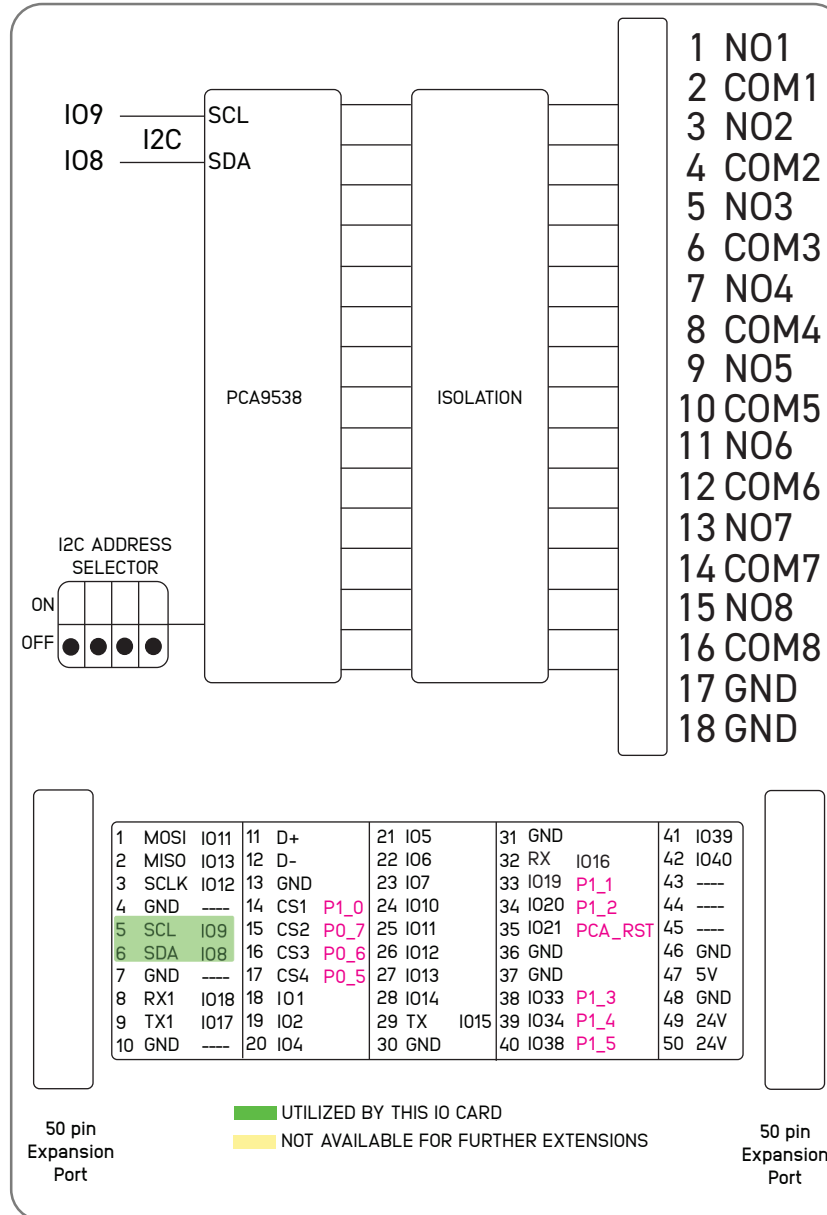

# Quick Guide

## Connections and Programming

**Power**  
Supply Voltage: 24V DC

**Micro-controller**  
Chip: ESP32S3-WROOM-1U  
SCL: IO9  
SDA: IO8

### I2C Address Selection

Address Selection				
DIP 1	DIP 2	DIP 3	DIP 3	Address
OFF	OFF	x	x	0x73
ON	OFF	x	x	0x72
OFF	ON	x	x	0x71
ON	ON	x	x	0x70

### Relay Output

